


# MELPe 1200 bps Vocoder

STANAG 4591 standard 1200 bps vocoder.

**MELPe Technology Features.** The MELPe 1200 bps Vocoder is based on well-known mixed MBE + LPC technology, where excitation function of the LPC-filter is a frequency-depending mixture of the pitch harmonics with noise, formed like in MBE vocoders.

**Speech Quality.** Here is the comparison with more modern SPR 1200 bps and TWELP 1200 bps vocoders in noiseless channel. MELPe 1200 bps vocoder, SPR 1200 bps vocoder and TWELP 1200 bps vocoder were tested, using ITU-T P.50 speech base for 20 different languages. ITU-T P.862 utility was used for estimation of the speech quality in PESQ terms:

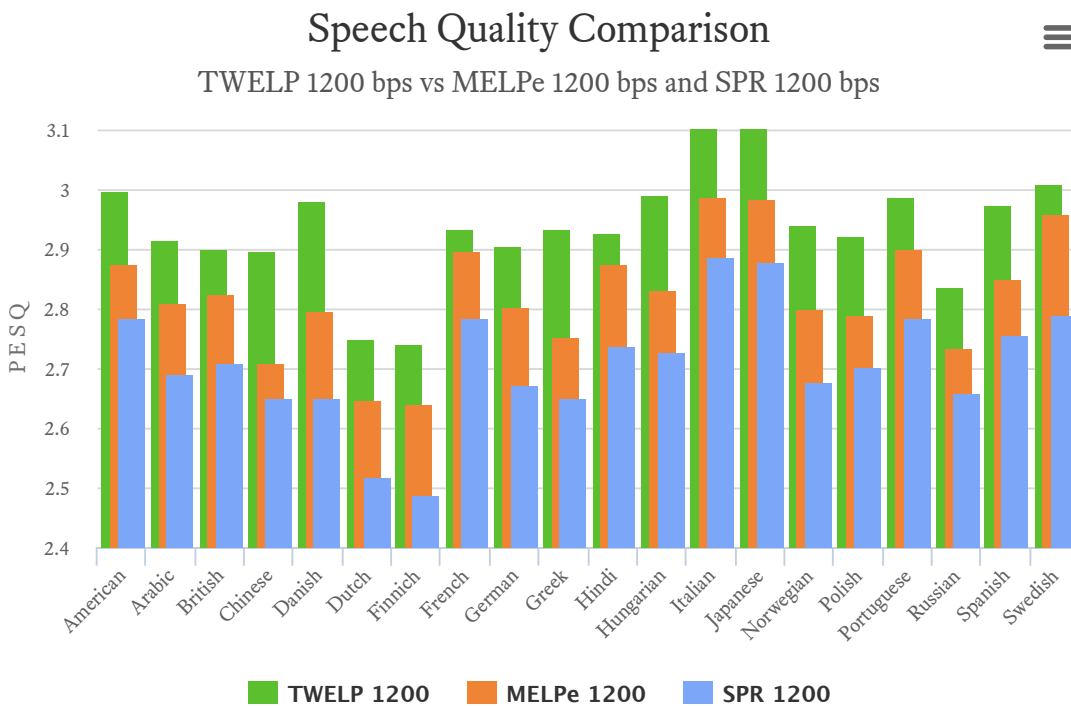

A diagram demonstrates superiority of the TWELP 1200 bps over MELPe 1200 bps and SPR 1200 bps in speech quality in clear channel. TWELP 1200 bps vocoder provides the best speech quality, but consumes much more (~3 times more) computing resources and memory in comparison with SPR 1200 bps vocoder. Exact numbers of the speech quality are presented in the table below.

Language	TWELP 1200	MELPe 1200	SPR 1200
American	2.997	2.876	2.784
Arabic	2.917	2.809	2.690
British	2.9	2.826	2.710

Chinese	2.898	2.71	2.651
Danish	2.98	2.797	2.650
Dutch	2.751	2.646	2.518
Finnich	2.74	2.641	2.489
French	2.934	2.897	2.784
German	2.906	2.803	2.671
Greek	2.933	2.753	2.651
Hindi	2.927	2.875	2.736
Hungarian	2.991	2.831	2.727
Italian	3.102	2.989	2.888
Japanese	3.113	2.983	2.877
Norwegian	2.941	2.800	2.678
Polish	2.922	2.792	2.704
Portuguese	2.986	2.900	2.785
Russian	2.837	2.735	2.658
Spanish	2.976	2.851	2.756
Swedish	3.009	2.958	2.792
<b>Average</b>	<b>2.938</b>	<b>2.824</b>	<b>2.710</b>

**Superiority of the MELPe 1200 over SPR 1200 is on average 0.114 PESQ and TWELP 1200 over MELPe 1200 - 0.114 PESQ**

**Speech Samples (WAV-files).** A few independent experts listened SPR 1200 bps vocoder in comparison with MELPe 1200 bps vocoder and TWELP 1200 bps vocoder, using method of preferences. Majority of experts preferred TWELP to SPR and MELPe, having noted much more natural human-sounding of voice in the TWELP vocoder. Experts haven't found significant difference in sounding between SPR 1200 and MELPe 1200 vocoders.

You can play and listen short samples of the source speech as well as the speech processed by these vocoders for any of 20 languages, using links in the table below.

Also, you can download full set of the P.50 samples as zip-files for all languages simultaneously, using the links in the "Downloads" para in a bottom of the page.

Language	Source speech	MELPe 1200 bps	SPR 1200 bps	TWELP 1200 bps
American	▶	▶	▶	▶
Arabic	▶	▶	▶	▶
British	▶	▶	▶	▶
Chinese	▶	▶	▶	▶
Danish	▶	▶	▶	▶
Dutch	▶	▶	▶	▶
Finnich	▶	▶	▶	▶
French	▶	▶	▶	▶
German	▶	▶	▶	▶

Greek	▶	▶	▶	▶
Hindi	▶	▶	▶	▶
Hungarian	▶	▶	▶	▶
Italian	▶	▶	▶	▶
Japanese	▶	▶	▶	▶
Norwegian	▶	▶	▶	▶
Polish	▶	▶	▶	▶
Portuguese	▶	▶	▶	▶
Russian	▶	▶	▶	▶
Spanish	▶	▶	▶	▶
Swedish	▶	▶	▶	▶

**Superiority In Quality Of The Non-speech Signals.** In contrast to other LBR vocoders (MELPe, AMBE+2, etc.), TWELP vocoders provide high quality of non-speech signals, including police, ambulance, fire sirens, etc. This feature in conjunction with high quality natural human-sounding of voice makes TWELP vocoders well suitable for replacement of analog radio by digital radio and also for other applications where high quality transmitting of non-speech signals is relevant along with high quality transmitting of speech signals.

Source type	Source signal	MELPe 1200 bps	SPR 1200 bps	TWELP 1200 bps
Siren only	▶	▶	▶	▶
With voice	▶	▶	▶	▶

**High Robustness To Acoustic Noise.** In contrast to other LBR vocoders, TWELP vocoders are well robust to acoustic noise thanks to robust reliable method of pitch estimation and other features of TWELP technology.


Moreover, vocoder includes in-built Noise Cancellation—Speech Enhancement (NCSE) functionality that improves speech quality in noisy acoustic environment.

NCSE Mode	Source signal	MELPe 1200 bps	SPR 1200 bps	TWELP 1200 bps
Disabled	▶	▶	▶	▶
Enabled	▶	▶	▶	▶

**High Robustness To The Channel Errors.** The diagram and table below show a dependence of the averaged speech quality for AWGN-noisy channel for different BER in comparison with other vocoders.

SPR vocoder is robust already to the channel errors. Also, special "robust" versions of the SPR and TWELP vocoders include FEC that are integrated with vocoder on base of "joint source-channel coding" approach that provides high speech quality simultaneously in noisy channel as well as in noiseless channel. FEC can operate with "soft decisions" as well as with "hard decisions" from a modem. "Soft decisions" mode provides much better robustness in comparison with the "hard decisions" mode.

## Averaged Speech Quality in AWGN channel

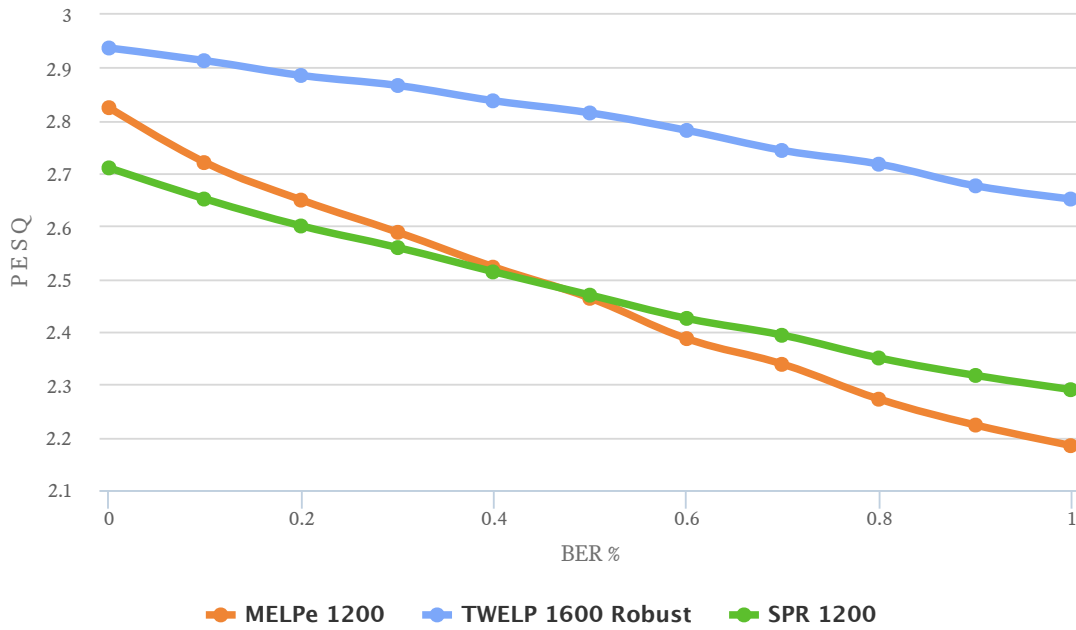

<b>BER %</b>	<b>MELPe 1200</b>	<b>TWELP 1600 Robust</b>	<b>SPR 1200</b>
<b>0.00</b>	2.824	2.937	2.710
<b>0.10</b>	2.72	2.913	2.651
<b>0.20</b>	2.649	2.885	2.600
<b>0.30</b>	2.588	2.866	2.559
<b>0.40</b>	2.522	2.837	2.513
<b>0.50</b>	2.463	2.814	2.469
<b>0.60</b>	2.3867	2.781	2.425
<b>0.70</b>	2.338	2.743	2.393
<b>0.80</b>	2.272	2.717	2.350
<b>0.90</b>	2.223	2.676	2.317
<b>1.00</b>	2.184	2.651	2.290

**Additional functionality.** MELPe vocoder software includes NPP (Noise Pre-Processor) module.

### Technical Characteristics And Resource Requirements:

## Technical characteristics

<b>Bit Rate</b> (bps)	<b>Algorithm</b>	<b>Frame size</b> (ms)	<b>Algorithmic delay</b> (including frame size) (ms)	<b>Sampling rate</b> (kHz)	<b>Signal format</b>	<b>Bit stream format</b>
1200	MELPe	67.5	87.5	8	Linear 16-bit PCM	81

## Resources for ARM Cortex-M4 platform (preliminary)

<b>Module</b>	<b>MIPS*</b> <b>peak</b>	<b>Memory (KBytes)</b>				
		<b>Program</b>	<b>Data</b>			
			<b>Constants</b>	<b>Channel</b>	<b>Heap</b>	<b>Stack</b>
NPP	54	69	77.3	23.9	0	2.4
Voice Encoder	68					
Voice Decoder	36					
<b>Total</b>	<b>158</b>					

## Resources for TI's C64 DSP platform

Module	MIPS* peak	Memory (KBytes)				
		Program	Data			
			Constants	Channel	Heap	Stack
NPP	20.3	136	77.3	23.9	0	2.4
Voice Encoder	29.1					
Voice Decoder	12.5					
Total	61.9					

## Resources for TI's C55 DSP platform

Module	MIPS* peak	Memory (KBytes)				
		Program	Data			
			Constants	Channel	Heap	Stack
NPP	7.9	52.8	77.3	23.9	0	2.4
Voice Encoder	18.2					
Voice Decoder	5.0					
Total	31.0					

\* DSPINI continues optimization of the MELPe code in order to minimize computational complexity of the vocoder.

**Guarantee And Support.** DSPINI guarantees a quality and accordance of all technical characteristics of the product to requirement of current specifications. Testing and other method of quality control are used for guarantee support.

**Any Platforms.** DSPINI can port this vocoder software into any other DSP, RISC or general- purposes platform inshort time: 1-2 months.

**Licensing Terms.** Our license covers a right to use our optimized code, but doesn't cover IP-holders rights on the MELPe technology (TI, Microsoft, Thales, etc.).

**Customization.** The vocoder can be customized under any specific requirements- other bit rate, frame size, any other robustness to channel errors, etc. Please contact with us for details.

**Related Software.** This vocoder may be effectively used in a bundle with other DSPINI's products:

- Linear and acoustic echo cancellers,
- Multichannel noise cancellers (including two-microphone adaptive array),
- Wired or radiomodems for any types of channels and bitrates,
- Other products.

#### **Downloads:**

- [Datasheet \(pdf\)](#)
- [ITU-T P.50 source speech samples \(zip\)](#)
- [MELPe 1200 bps speech samples \(zip\)](#)
- [SPR 1200 bps speech samples \(zip\)](#)
- [TWELP 1200 bps speech samples \(zip\)](#)
- PC-evaluation package (zip) — on request
- User's Guide document (pdf) — on request

Please contact us by e-mail:

**[request@dspini.com](mailto:request@dspini.com)**

or by phone:

+44 20 81 33 00 44

+33 9 70 40 33 99

Tri-Wave Excited Linear Prediction, TWELP, DSPINI and DSP Innovations logo are trademarks of DSP Innovations.  
© 2007–2018 DSP Innovations. All rights reserved.